


C-Series

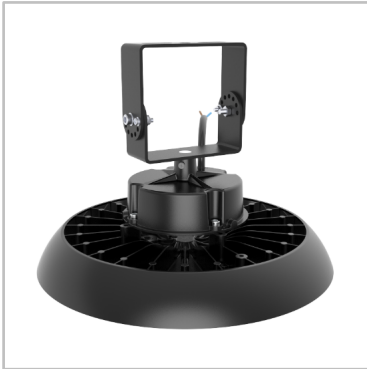

KEY ADVANTAGES

- Top and bottom vent convection, high-quality heat dissipation
- Wattage from 100W to 200W optional
- Power Selectable (Optional)
- High energy savings compared to systems with traditional discharge lamps
- Light-on-demand feature with optional motion sensor
- Robust design
- Emergency lighting with optional battery
- High visual comfort
- No hazardous materials
- Fast ROI thanks to long life span and reduced maintenance
- Compact housing optimised for heat dissipation and reduced dust accumulation
- Dedicated range of mounting accessories

TYPES OF APPLICATION

- CAR PARKS
- LARGE AREAS
- INDUSTRIAL HALLS & WAREHOUSES
- SPORT FACILITIES



CAR PARKS



LARGE AREAS



INDUSTRIAL
HALLS &
WAREHOUSES



SPORT
FACILITIES

C-SERIES | CHARACTERISTICS

GENERAL INFORMATION

Driver included	Yes
CE mark	Yes
RoHS compliant	Yes
SAA Mark	Yes
Safety features	Open circuit protection Short circuit protection Overvoltage protection
Testing standard	LM-79-19(all measurements in ISO17025 accredited laboratory)

HOUSING AND FINISH

Housing	Aluminium
Optic	Polycarbonate
Protector	Polycarbonate (with integrated lenses)
Housing finish	Electrostatic polyester powder coating
Standard colour(s)	RAL 9017 black
Tightness level	IP 65
Impact resistance	IK 09

OPERATING CONDITIONS

Operating temperature range (Ta)	-30°C to + 50°C
Operating Humidity	10-90%RH
Mounting Option	Loop Hanging Bracket Mounting
Warranty	5 years

PERFORMANCE

Power	100W/150W/200W
Efficacy	210lm/W,190lm/W, 170lm/W,150lm/W
Power Efficiency	≥93%
Start Time	≤0.2S
Warm-up time to 60%	0.5S

ELECTRICAL INFORMATION

Electrical class	Class I EU
Nominal voltage	120-277V 50/60Hz
Power factor (at full load)	0.9
Surge protection options (kV)	6KV-Line-Line 6KV-Line-Earth
Electromagnetic compatibility (EMC)	EN 55015:2019/A11:2020, EN 61000 3-2:2019, EN 61000-3-3:2013, EN 61547:2009, EN 62493:2015
Control protocol(s)	1-10V, DALI2 (optional)
Sensor	Motion sensor (optional)
Emergency	Optional auxiliary battery
Total Harmonic Distortion(THD)	IEC 61000-3-2 Class C <20%
Driver Type	Constant current(CC)

For fixed Class 1 luminaires, overvoltage protective devices which comply with IEC 61643-11 shall be disconnected from the circuit.

withstand voltage 1.5KV 60S 10mA

※Lamp switch must control L line or control L and N lines.

OPTICAL INFORMATION

LED Type	SMD2835
Beam Angle	60° / 90° / 120°
Recommended installation height	4m to 12m
Color Tolerance	Ra70 ≤7 Ra80 ≤5
LED colour temperature	3000K / 4000K / 5000K / 5700K / 6500K
Colour rendering index (CRI)	CRI>70 standard CRI>80 optional
Upward Light Output Ratio (ULOR)	0%

※Ra measurement tolerance is ±2.

LIFETIME OF THE LEDS @ TA 25°C

All configurations	
L70B50	>100,000h
L80B20	>50,000h
L90B10	>30,000h
Switching Cycles	>100,000 times

C-SERIES | PERFORMANCE

PREMIUM VERSION

POWER		LUMENS		EFFICACY	
100W			21,000LM		210LM/W(Ra70)
			19,000LM		190LM/W(Ra80)
150W			31,500LM		210LM/W(Ra70)
			28,550LM		190LM/W(Ra80)
200W			42,000LM		210LM/W(Ra70)
			38,000LM		190LM/W(Ra80)

PRO VERSION

POWER		LUMENS		EFFICACY	
100W			19,000LM		190LM/W(Ra70)
			18,000LM		180LM/W(Ra80)
150W			28,500LM		190LM/W(Ra70)
			27,000LM		180LM/W(Ra80)
200W			38,000LM		190LM/W(Ra70)
			36,000LM		180LM/W(Ra80)

STANDARD VERSION

POWER		LUMENS		EFFICACY	
100W			17,000LM		170LM/W(Ra70)
			15,700LM		157LM/W(Ra80)
150W			25,500LM		170LM/W(Ra70)
			24,000LM		160LM/W(Ra80)
200W			34,000LM		170LM/W(Ra70)
			32,000LM		160LM/W(Ra80)

ECO VERSION

POWER		LUMENS		EFFICACY	
100W			15,000LM		150LM/W(Ra70)
			14,000LM		140LM/W(Ra80)
150W			22,500LM		150LM/W(Ra70)
			21,000LM		140LM/W(Ra80)
200W			30,000LM		150LM/W(Ra70)
			28,000LM		140LM/W(Ra80)

※ The Performance Data is tested base on 230VAC, 90° and 4000K for all versions
 ※ Power Consumption Tolerance ±5% (Apply to all versions)
 ※ Lumen Efficiency Tolerance ±5% (Apply to all versions)

C-SERIES | PACKING

PACKAGING

POWER	PACKAGE SIZE	QTY/CTN	SINGLE PIECE VOLUME	NET WEIGHT	GROSS WEIGHT	20GP	40HQ
100W	L300*W300*H160mm	1PCS/CTN	0.0144m ³	1.9kg	2.3kg	1807pcs	4583pcs
150W	L350*W350*H165mm	1PCS/CTN	0.0202m ³	2.3kg	3.0kg	1286pcs	3265pcs
200W	L390*W390*H170mm	1PCS/CTN	0.0259m ³	2.9kg	3.7kg	1006pcs	2553pcs

EGGSHELL PACKAGING


POWER	PACKAGE SIZE	QTY/CTN	SINGLE PIECE VOLUME	NET WEIGHT	GROSS WEIGHT	20GP	40HQ
100W	L305*W305*H150mm	1PCS/CTN	0.0140m ³	1.9kg	2.3kg	1863pcs	4730pcs
150W	L345*W345*H160mm	1PCS/CTN	0.0190m ³	2.3kg	3.0kg	1365pcs	3466pcs
200W	L395*W395*H160mm	1PCS/CTN	0.0250m ³	2.9kg	3.7kg	1042pcs	2644pcs

PALLET PACKAGING

POWER	PALLET SIZE	QTY/CTN	TOTAL	CONTAINER SIZE	PALLET QTY	TOTAL
100W	L1100*W1100*H1875mm	1PCS/CTN	129PCS	L5500*W2200*H1875mm	10	1290PCS
150W	L1100*W1100*H1985mm	1PCS/CTN	99PCS	L5500*W2200*H1985mm	10	990PCS
200W	L1100*W1100*H1985mm	1PCS/CTN	76PCS	L5500*W2200*H1875mm	10	760PCS

C-SERIES | OPTICS AND ACCESSORIES


LIGHT DISTRIBUTIONS

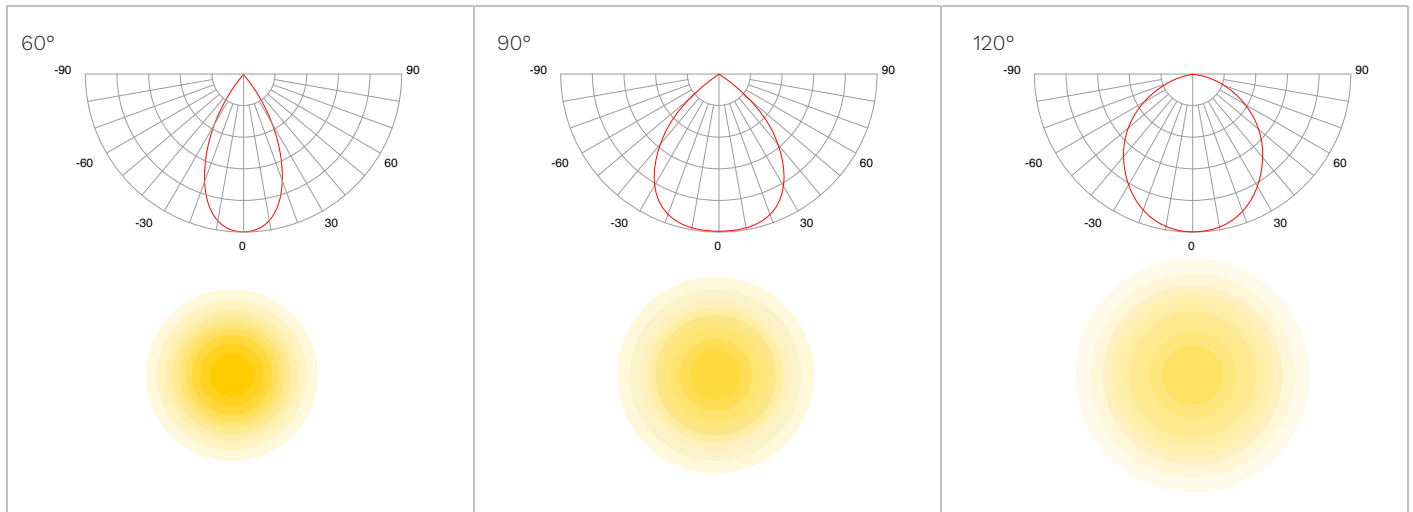

OPTIONAL





ACCESSORIES

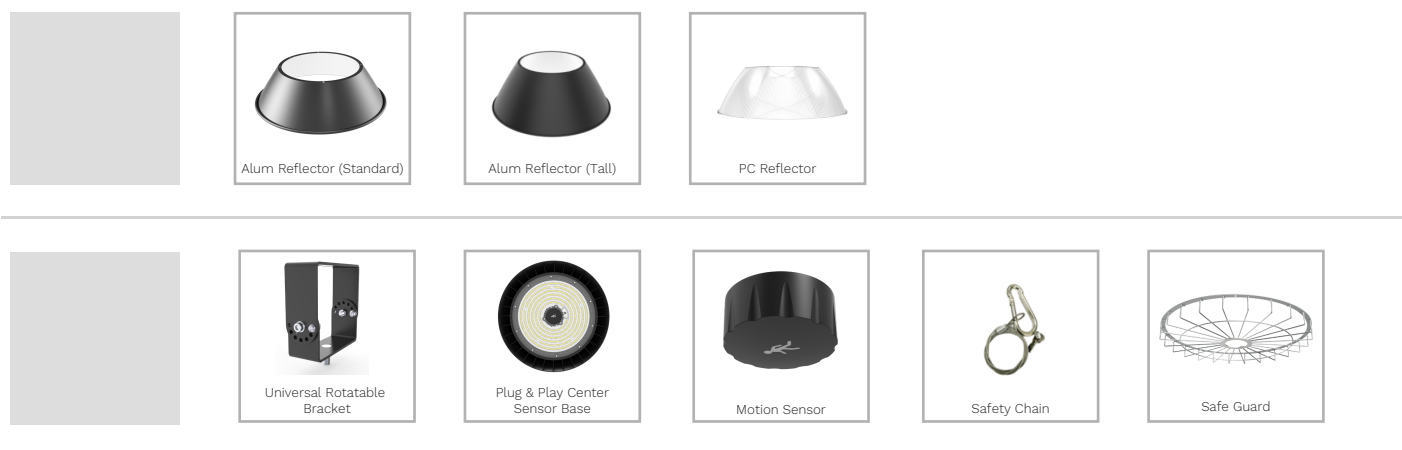


C-SERIES | DRAWING

⚠ Connecting the cable requires an IP65 Tightness level

100W





Universal Reflector

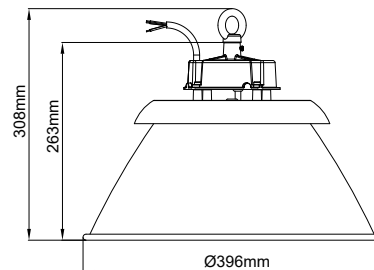


Tall Reflector

150W





Universal Reflector

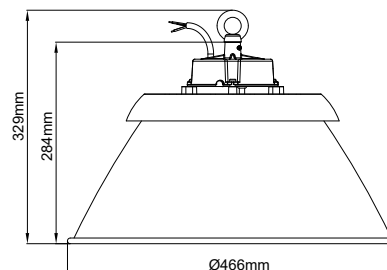


Tall Reflector

200W

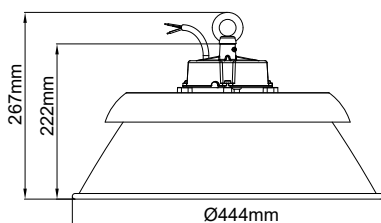

Universal Reflector

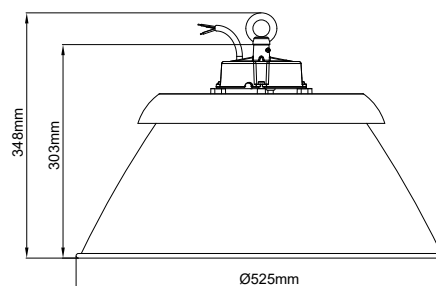

Tall Reflector